

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number  
**WO 02/24992 A1**

(51) International Patent Classification<sup>7</sup>: **D01F 8/04, 1/10**

(21) International Application Number: **PCT/US01/29648**

(22) International Filing Date:  
21 September 2001 (21.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/234,410 21 September 2000 (21.09.2000) US

(71) Applicant: **OUTLAST TECHNOLOGIES, INC.**  
[US/US]; 6235 Lookout Road, Boulder, CO 80301 (US).

(72) Inventors: **MAGILL, Monte, C.**; 449 Westview Court,  
Longmont, CO 80501 (US). **HARTMANN, Mark, H.**;  
256 Rockview Drive, Superior, CO 80027 (US).

(74) Agents: **GALLIANI, William, S.**; Cooley Godward LLP,  
3000 El Camino Real, Five Palo Alto Square, Palo Alto,  
CA 94306-2155 et al. (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **MULTI-COMPONENT FIBERS HAVING REVERSIBLE THERMAL PROPERTIES**

(57) Abstract: The invention relates to a multi-component fiber having enhanced reversible thermal properties. The multi-component fiber comprises a fiber body formed from a plurality of elongated members, at least one of the elongated members having a temperature regulating material dispersed therein. The temperature regulating material comprises a phase change material. The multi-component fiber may be used or incorporated in various articles and applications where a thermal regulating property is desired. For example, the multi-component fiber may be used in textiles, apparel, footwear, medical products, containers and packagings, buildings, appliances, and other products.

WO 02/24992 A1

## MULTI-COMPONENT FIBERS HAVING REVERSIBLE THERMAL PROPERTIES

## FIELD OF THE INVENTION

5 The present invention relates to synthetic fibers having enhanced reversible thermal properties. More particularly, the present invention relates to multi-component fibers comprising phase change materials and to the formation of such fibers via a melt spinning process.

## BACKGROUND OF THE INVENTION

10 Many fabric materials are made from synthetic fibers. Conventionally, two processes are used to manufacture synthetic fibers: a wet solution process and a melt spinning process. The wet solution process is generally used to form acrylic fibers, while the melt spinning process is generally used to form nylon fibers, polyester fibers, polypropylene fibers, and other similar type fibers. As is well known, a nylon fiber comprises a long-chain synthetic polyamide polymer characterized by the presence of an amide group -CONH-, a polyester fiber comprises a long-chain synthetic polymer having at least 85 percent by weight of an ester of a substituted aromatic carboxylic acid unit, and a polypropylene fiber comprises a long-chain synthetic crystalline polymer having at least 85 percent by weight of an olefin unit and typically having a molecular weight of about 40,000 or more.

20 The melt spinning process is of particular interest since a large portion of the synthetic fibers that are used in the textile industry are manufactured by this technique. The melt spinning process generally involves passing a melted polymeric material through a device that is known as a spinneret to thereby form a plurality of individual synthetic fibers. Once formed, the synthetic fibers may be collected into a strand or made into a cut staple. Synthetic fibers can be used to make woven or non-woven fabric materials, or alternatively, synthetic fibers can be wound into a yarn to be used thereafter in a weaving or a knitting process to form a synthetic fabric material.

25 Phase change materials have been incorporated into acrylic fibers to provide enhanced reversible thermal properties to the fibers themselves as well as to fabric materials

made therefrom. This is readily accomplished, in part due to the high levels of volatile materials (e.g., solvents) typically associated with the wet solution process of forming acrylic fibers. However, it is more problematic to incorporate phase change materials into melt spun synthetic fibers, since high levels of volatile materials typically are not present or  
5 desired in the melt spinning process. Previous attempts to incorporate phase change materials into melt spun synthetic fibers typically involved mixing the phase change materials with a standard fiber-grade thermoplastic polymer to form a blend and subsequently melt spinning this blend to form the synthetic fibers. Such attempts generally led to inadequate dispersion of the phase change materials within the fibers, poor fiber  
10 properties, and poor processability unless low concentrations of phase change materials were used. However, with low concentrations of the phase change materials, the desired enhanced reversible thermal properties normally associated with use of the phase change materials are difficult to realize.

It is against this background that a need arose to develop multi-component fibers  
15 comprising phase change materials.

## SUMMARY OF THE INVENTION

In one innovative aspect, the present invention relates to a multi-component fiber  
20 having enhanced reversible thermal properties. In one exemplary embodiment, the multi-component fiber may comprise a fiber body formed from a plurality of elongated members, wherein at least one of the elongated members has a temperature regulating material dispersed therein, and the temperature regulating material comprises a phase change material.

25 In another exemplary embodiment, the multi-component fiber may comprise a first elongated member comprising a first polymeric material and a temperature regulating material dispersed within the first polymeric material, wherein the temperature regulating material comprises a phase change material. The multi-component fiber also may comprise a second elongated member comprising a second polymeric material, wherein the second  
30 elongated member is joined with the first elongated member.

In still another exemplary embodiment, the multi-component fiber may comprise a core member comprising a first polymeric material and a temperature regulating material dispersed within the first polymeric material, wherein the temperature regulating material

comprises a phase change material. The multi-component fiber may further comprise a sheath member comprising a second polymeric material, wherein the sheath member surrounds the core member.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the nature and objects of the invention, reference should be made to the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 illustrates enlarged cross sectional views of various exemplary multi-component fibers according to some embodiments of the invention;

FIG. 2 illustrates a three-dimensional view of an exemplary core/sheath fiber according to an embodiment of the invention;

FIG. 3 illustrates a three-dimensional view of another exemplary core/sheath fiber according to an embodiment of the invention; and

FIG. 4 shows a number of properties and manufacturing parameters of six core/sheath fibers that were produced as discussed in Example 1.

## DETAILED DESCRIPTION

The present invention relates to multi-component fibers comprising one or more phase change materials. Multi-component fibers in accordance with various embodiments of the invention have the ability to absorb or release thermal energy to reduce or eliminate heat flow. In addition, such multi-component fibers may exhibit improved processability (e.g., during manufacturing of the fibers or of an article made therefrom), improved strength, improved containment of a phase change material that is dispersed within the fibers, or higher loading levels of the phase change material. The multi-component fibers may be used or incorporated in various articles and applications to provide a thermal regulating property while providing improved strength to the articles and applications. For example, multi-component fibers in accordance with embodiments of the invention may be used in textiles (e.g., fabric materials), apparel (e.g., outdoor clothing, drysuits, and protective suits), footwear (e.g., socks, boots, and insoles), medical products (e.g., thermal blankets, therapeutic pads, incontinent pads, and hot/cold packs), containers and packagings

(e.g., beverage/food containers, food warmers, seat cushions, and circuit board laminates), buildings (e.g., insulation in walls or ceilings, wallpaper, curtain linings, pipe wraps, carpets, and tiles), appliances (e.g., insulation in house appliances), and other products (e.g., automotive lining material, sleeping bags, and bedding).

5 In conjunction with the thermal regulating property provided, multi-component fibers in accordance with various embodiments of the present invention, when incorporated, for example, in apparel or footwear, may provide a reduction in an individual's skin moisture, such as, due to perspiration. For instance, the multi-component fibers may lower the temperature or the relative humidity of the skin, thereby providing a lower degree of skin moisture and a higher level of comfort. The use of specific materials and specific  
10 apparel or footwear design features may further enhance this moisture reduction result.

A multi-component fiber according to some embodiments of the invention may comprise a plurality of elongated members. According to some embodiments of the invention, the multi-component fiber may comprise a fiber body formed from the plurality  
15 of elongated members. The fiber body typically will be elongated and may have a length that is several times (e.g., 100 times or more) greater than its diameter. The fiber body may have a variety of regular or irregular cross sectional shapes such as, by way of example and not by limitation, circular, multi-lobal, octagonal, oval, pentagonal, rectangular, square-shaped, trapezoidal, triangular, wedge-shaped, and so forth. According to some  
20 embodiments of the invention, two or more of the elongated members (e.g., two adjacent elongated members) may be joined, combined, united, or bonded to form a unitary fiber body. The elongated members may comprise the same or different polymeric materials, and at least one of the elongated members may have a temperature regulating material dispersed therein. According to some embodiments of the invention, the temperature regulating  
25 material will typically comprise a phase change material that provides the multi-component fiber with enhanced reversible thermal properties.

The elongated members may be arranged in a variety of configurations. For instance, the elongated members may be arranged in an island-in-sea configuration, a core-sheath configuration, a matrix or checkerboard configuration, a segmented-pie  
30 configuration, a side-by-side configuration, a striped configuration, and so forth. According to some embodiments of the invention, the elongated members may be arranged in a bundle form wherein the elongated members are generally parallel with respect to one another. According to other embodiments of the invention, the elongated members may extend

through a substantial portion of a length of the fiber body, and, if desired, they may be longitudinally coextensive.

According to some embodiments of the invention, the multi-component fiber may be between about 0.1 to about 100 denier and typically between about 0.5 to about 10 denier. As one of ordinary skill in the art will understand, a denier is typically understood to be a measure of weight per unit length of a fiber (i.e., grams per 9000 meters).

Depending upon the method of manufacturing the multi-component fiber, desirability of further processing, or particular application of the multi-component fiber, the multi-component fiber may further comprise one or more additional components, such as, for example, water, surfactants, dispersants, anti-foam agents (e.g., silicone containing compounds and flourine containing compounds), antioxidants (e.g., hindered phenols and phosphites), thermal stabilizers (e.g., phosphites, organophosphorous compounds, metal salts of organic carboxylic acids, and phenolic compounds), microwave absorbing additives (e.g., multifunctional primary alcohols, glycerine, and carbon), reinforcing-fibers (e.g., carbon fibers, aramid fibers, and glass fibers), conductive fibers or particles (e.g., graphite or activated carbon fibers or particles), lubricants, process aids (e.g., metal salts of fatty acids, fatty acid esters, fatty acid ethers, fatty acid amides, sulfonamides, polysiloxanes, organophosphorous compounds, and phenolic polyethers), fire retardants (e.g., halogenated compounds, phosphorous compounds, and boron compounds), and so forth. The one or more additional components may be dispersed within one or more of the elongated members comprising the multi-component fiber. In addition, certain treatments or coatings may be applied to the multi-component fiber to impart additional properties such as, by way of example and not by limitation, stain resistance, water repellency, softer feel, and moisture management properties. Exemplary treatments and coatings include Epic by Nextec Applications Inc., Intera by Intera Technologies, Inc., Zonyl Fabric Protectors by DuPont Inc., Scotchgard by 3M Co., and so forth.

The invention can be more fully appreciated with reference to FIG. 1, which provides, by way of example and not by limitation, enlarged cross-sectional views of various exemplary multi-component fibers 12, 13, 14, 21, 22, ..., 24, 26, 27, 28, 29, and 34 according to some embodiments of the invention. More particularly, FIG. 1 illustrates a variety of exemplary configurations of arranging elongated members comprising the multi-component fibers, according to some embodiments of the invention.

As shown in FIG. 1, each multi-component fiber (e.g., 21) comprises a plurality of distinct cross sectional domains corresponding to a plurality of elongated members (e.g., 39 and 40) that form the multi-component fiber. According to the presently illustrated embodiments, the elongated members include a first elongated member (or a first plurality of elongated members) (shown shaded in FIG. 1) and a second elongated member (or a second plurality of elongated members) (shown unshaded in FIG. 1). Here, the first elongated member (or the first plurality of elongated members) preferably may be formed from a polymeric material that has a temperature regulating material dispersed therein. The second elongated member (or the second plurality of elongated members) may be formed from the same polymeric material or another polymeric material having somewhat different properties.

While FIG. 1 illustrates multi-component fibers with circular or tri-lobal cross sectional shapes, multi-component fibers with a variety of other regular or irregular cross sectional shapes are encompassed by the invention, such as, by way of example and not by limitation, multi-lobal, octagonal, oval, pentagonal, rectangular, square-shaped, trapezoidal, triangular, wedge-shaped, and so forth. It should be recognized that, in general, a first plurality of elongated members may be formed from the same or different polymeric materials, and a second plurality of elongated members may be formed from the same or different polymeric materials. Moreover, a temperature regulating material may be dispersed within a second elongated member (or a second plurality of elongated members), according to some embodiments of the invention. It should be further recognized that two or more different temperature regulating materials may be dispersed within the same or different elongated members. For instance, a first temperature regulating material may be dispersed within a first elongated member, and a second temperature regulating material having somewhat different properties may be dispersed within a second elongated member (e.g., two different phase change materials). Additionally, it should be recognized that the number, shapes, and sizes of the elongated members shown in FIG. 1 are illustrated by way of example and not by limitation, and various other embodiments are within the scope of the invention.

With reference to FIG. 1, left-hand column 10 illustrates three exemplary multi-component fibers 12, 13, and 14. Multi-component fiber 12 comprises a plurality of elongated members arranged in a segmented-pie configuration. In the present embodiment, a first plurality of elongated members 15, 15', 15'', 15''', and 15'''' and a second plurality

of elongated members 16, 16', 16'', 16''', and 16'''' are arranged in an alternating fashion and have cross sectional areas that are wedge-shaped. In general, the elongated members may have the same or different cross sectional shapes or sizes. Moreover, while multi-component fiber 12 is shown comprising ten elongated members, it should be recognized that, in general, two or more elongated members may be arranged in a segmented-pie configuration, and at least one of the elongated members typically has a temperature regulating material dispersed therein.

Multi-component fiber 13 comprises a plurality of elongated members arranged in an island-in-sea configuration. In the present embodiment, a first plurality of elongated members 35, 35', 35'', 35''', etc. are positioned within and surrounded by a second elongated member 36. In the present embodiment, each of the first plurality of elongated members has a cross sectional shape that is trapezoidal. It should be recognized, however, that a variety of other regular or irregular cross sectional shapes are encompassed by the invention, such as, by way of example and not by limitation, circular, multi-lobal, octagonal, oval, pentagonal, rectangular, square-shaped, triangular, wedge-shaped, and so forth. In general, the first plurality of elongated members 35, 35', 35'', 35''', etc. may have the same or different cross sectional shapes or sizes. Moreover, while multi-component fiber 13 is shown with seventeen elongated members 35, 35', 35'', 35''', etc. positioned within and surrounded by the second elongated member 36, it should be recognized that, in general, one or more elongated members may be positioned within and surrounded by the second elongated member 36.

Multi-component fiber 14 comprises a plurality of elongated members arranged in a striped configuration. In the present embodiment, a first plurality of elongated members 37, 37', 37'', 37''', and 37'''' and a second plurality of elongated members 38, 38', 38'', and 38''' are arranged in an alternating fashion and are shaped as longitudinal slices of the multi-component fiber 14. In general, the elongated members may have the same or different cross sectional shapes or sizes (e.g., widths associated with the longitudinal slices). Moreover, while multi-component fiber 14 is shown comprising nine elongated members, it should be recognized that, in general, two or more elongated members may be arranged in a striped configuration, and at least one of the elongated members typically has a temperature regulating material dispersed therein.

In the case of multi-component fibers 12 and 14, a first elongated member (e.g., 15) is shown partially surrounded by an adjacent second elongated member or members (e.g.,



16 and 16'''), whereas, in the case of multi-component fiber 13, a first elongated member (e.g., 35) is shown completely surrounded by a unitary second elongated member 36. When a first elongated member (e.g., 15) is not completely surrounded, it may be desirable, but not required, that a containment structure (e.g., microcapsules) be used to contain a phase change material dispersed within the first elongated member.

Middle column 20 of FIG. 1 illustrates four exemplary core/sheath fibers 21, 22, 23, and 24. In particular, core/sheath fibers 21, 22, 23, and 24 each comprises a plurality of elongated members arranged in a core-sheath configuration.

Core/sheath fiber 21 comprises a first elongated member 39 positioned within and surrounded by a second elongated member 40. More particularly, the first elongated member 39 is formed as a core member having a temperature regulating material dispersed therein. This core member is shown concentrically positioned within and completely surrounded by the second elongated member 40 that is formed as a sheath member. Here, core/sheath fiber 21 comprises 25 percent by weight of the core member and 75 percent by weight of the sheath member.

Core/sheath fiber 22 comprises a first elongated member 41 positioned within and surrounded by a second elongated member 42. As with the previously discussed embodiment, the first elongated member 41 is formed as a core member having a temperature regulating material dispersed therein and is concentrically positioned within and completely surrounded by the second elongated member 42 that is formed as a sheath member. Here, core/sheath fiber 22 comprises 50 percent by weight of the core member and 50 percent by weight of the sheath member.

Core/sheath fiber 23 comprises a first elongated member 43 positioned within and surrounded by a second elongated member 44. In the present embodiment, however, the first elongated member 43 is formed as a core member that is eccentrically positioned within the second elongated member 44 that is formed as a sheath member. Core/sheath fiber 23 may comprise virtually any percentages by weight of the core member and the sheath member to provide desired thermal regulating and mechanical properties.

Tri-lobal core/sheath fiber 24 comprises a first elongated member 45 positioned within and surrounded by a second elongated member 46. In the present embodiment, the first elongated member 45 is formed as a core member that has a tri-lobal cross sectional shape. This core member is concentrically positioned within the second elongated member 46 that is formed as a sheath member. Core/sheath fiber 23 may comprise virtually any

percentages by weight of the core member and the sheath member to provide desired thermal regulating and mechanical properties.

It should be recognized that a core member may, in general, have a variety of regular or irregular cross sectional shapes, such as, by way of example and not by limitation, circular, multi-lobal, octagonal, oval, pentagonal, rectangular, square-shaped, trapezoidal, triangular, wedge-shaped, and so forth. While core/sheath fibers 21, 22, 23, and 24 are shown with one core member positioned within and surrounded by a sheath member, it should be recognized that two or more core members may be positioned within and surrounded by a sheath member (e.g., in a manner similar to that shown for multi-component fiber 13). These two or more core members may have the same or different cross sectional shapes or sizes. According to some embodiments of the invention, a core/sheath fiber comprises three or more elongated members arranged in a core-sheath configuration, wherein the elongated members are shaped as concentric or eccentric longitudinal slices of the core/sheath fiber.

Right-hand column 30 of FIG. 1 illustrates a number of exemplary side-by-side fibers in accordance with some embodiments of the invention. In particular, side-by-side fibers 26, 27, 28, 29, and 34 each comprises a plurality of elongated members arranged in a side-by-side configuration.

Side-by-side fiber 26 comprises a first elongated member 47 positioned adjacent and partially surrounded by a second elongated member 48. In the present embodiment, the elongated members 47 and 48 have half-circular cross sectional shapes. Here, side-by-side fiber 26 comprises 50 percent by weight of the first elongated member 47 and 50 percent by weight of the second elongated member 48. It should be recognized that the elongated members 47 and 48 may, alternatively or in conjunction, be characterized as being arranged in a segmented-pie or a striped configuration.

Side-by-side fiber 27 comprises a first elongated member 49 positioned adjacent and partially surrounded by a second elongated member 50. In the present embodiment, side-by-side fiber 27 comprises 20 percent by weight of the first elongated member 49 and 80 percent by weight of the second elongated member 50. It should be recognized that the elongated members 49 and 50 may, alternatively or in conjunction, be characterized as being arranged in a core-sheath configuration, wherein the first elongated member 49 is eccentrically positioned with respect to and partially surrounded by the second elongated member 50.

Side-by-side fibers 28 and 29 are two exemplary mixed-viscosity fibers. Each fiber comprises a first elongated member 51 or 53 having a temperature regulating material dispersed therein that is positioned adjacent and partially surrounded by a second elongated member 52 or 54. A mixed viscosity-fiber is typically considered to be a self-crimping or self-texturing fiber, wherein the fiber's crimping or texturing imparts loft, bulk, insulation, stretch, or other like properties to the fiber. Typically, a mixed-viscosity fiber comprises a plurality of elongated members that are formed from different polymeric materials. For example, for side-by-side fiber 28, the first elongated member 51 may be formed from a first polymeric material, and the second elongated member 52 may be formed from a second polymeric material that may differ in some fashion from the first polymeric material. In the present embodiment, the first and second polymeric materials may comprise polymers with different viscosities or molecular weights (e.g., two polypropylenes with different molecular weights). When side-by-side fiber 28 is drawn, uneven stresses may be created between the two elongated members 51 and 52, and side-by-side fiber 28 may crimp or bend. According to other embodiments of the invention, the first and second polymeric materials may comprise polymers having different degrees of crystallinity. For instance, the first polymeric material may have a lower degree of crystallinity than the second polymeric material. When side-by-side fiber 28 is drawn, the first and second polymeric materials may undergo different degrees of crystallization and orientation to "lock" an orientation and strength into the fiber 28. A sufficient degree of crystallization may be desired to prevent or reduce reorientation of the fiber 28 during heat treatment. Side-by-side fibers 28 and 29 may comprise virtually any percentages by weight of the first and second elongated members to provide desired thermal regulating, mechanical, and self-crimping or self-texturing properties.

Side-by-side fiber 34 is an exemplary ABA fiber comprising a first elongated member 55 positioned between and partially surrounded by a second plurality of elongated members 56 and 56'. In the present embodiment, the first elongated member 55 is formed from a first polymeric material that has a temperature regulating material dispersed therein. Here, the second plurality of elongated members 56 and 56' may be formed from the first polymeric material or from a second polymeric material that may differ in some fashion from the first polymeric material. In general, the elongated members 56 and 56' may have the same or different cross sectional shapes or sizes (e.g., widths associated with the longitudinal slices). It should be recognized that the elongated members 55, 56, and 56'

may, alternatively or in conjunction, be characterized as being arranged in a striped configuration.

Turning next to FIG. 2, a three-dimensional view of an exemplary core/sheath fiber 59 is illustrated. Core/sheath fiber 59 comprises an elongated and generally cylindrical core member 57 positioned within and surrounded by an elongated and annular-shaped sheath member 58. The core member 57 has a temperature regulating material 61 dispersed therein and is positioned within and completely surrounded or encased by the sheath member 58. In the present embodiment, the temperature regulating material 61 comprises a plurality of microcapsules containing a phase change material, and the microcapsules may be uniformly dispersed throughout the core member 57. Those of ordinary skill in the art will appreciate that, while it may be preferred to have the microcapsules evenly dispersed within the core member 57, this is not necessary in all applications. The core member 57 may be concentrically or eccentrically positioned within the sheath member 58, and core/sheath fiber 59 may comprise virtually any percentages by weight of the core member 57 and the sheath member 58 to provide desired thermal regulating and mechanical properties.

With reference to FIG. 3, a three-dimensional view of another exemplary core/sheath fiber 60 is illustrated. As with core/sheath fiber 59, core/sheath fiber 60 comprises an elongated and generally cylindrical core member 63 positioned within and completely surrounded or encased by an elongated and annular-shaped sheath member 64. Here, a temperature regulating material 62 comprises a phase change material in a raw form (e.g., the phase change material is non-encapsulated, i.e., not micro- or macroencapsulated), and the phase change material may be uniformly dispersed throughout the core member 63. Those of ordinary skill in the art will appreciate that, while it may be preferred to have the phase change material evenly dispersed within the core member 63, this is not necessary in all applications. By surrounding the core member 63, the sheath member 64 may serve to enclose the phase change material within the core member 63. Accordingly, the sheath member 64 may reduce or prevent loss or leakage of the phase change material during fiber processing or during end use. The core member 63 may be concentrically or eccentrically positioned within the sheath member 64, and core/sheath fiber 60 may comprise virtually any percentages by weight of the core member 63 and the sheath member 64 to provide desired thermal regulating and mechanical properties.

As discussed above, a multi-component fiber according to some embodiments of the invention may comprise a temperature regulating material that is dispersed within one or

more elongated members. Typically, the temperature regulating material will be uniformly dispersed within at least one of the elongated members. However, depending upon the particular characteristics desired from the multi-component fiber, the dispersion of temperature regulating material may be varied within one or more of the elongated members. The temperature regulating material typically will comprise one or more phase change materials.

In general, a phase change material may comprise any substance (or mixture of substances) that has the capability of absorbing or releasing thermal energy to reduce or eliminate heat flow at or within a temperature stabilizing range. The temperature stabilizing range may comprise a particular transition temperature or range of transition temperatures. A phase change material used in conjunction with various embodiments of the invention preferably will be capable of inhibiting a flow of thermal energy during a time when the phase change material is absorbing or releasing heat, typically as the phase change material undergoes a transition between two states (e.g., liquid and solid states, liquid and gaseous states, solid and gaseous states, or two solid states). This action is typically transient, e.g., will occur until a latent heat of the phase change material is absorbed or released during a heating or cooling process. Thermal energy may be stored or removed from the phase change material, and the phase change material typically can be effectively recharged by a source of heat or cold. By selecting an appropriate phase change material, the multi-component fiber may be designed for use in any one of numerous products or applications.

According to some embodiments of the invention, a phase change material may be a solid/solid phase change material. A solid/solid phase change material is a type of phase change material that typically undergoes a transition between two solid states (e.g., a crystalline or mesocrystalline phase transformation) and hence typically does not become a liquid during use.

Phase change materials that can be incorporated in multi-component fibers in accordance with various embodiments of the invention include a variety of organic and inorganic substances. Exemplary phase change materials include, by way of example and not limitation, hydrocarbons (e.g., straight chain alkanes or paraffinic hydrocarbons, branched-chain alkanes, unsaturated hydrocarbons, halogenated hydrocarbons, and alicyclic hydrocarbons), hydrated salts (e.g., calcium chloride hexahydrate, calcium bromide hexahydrate, magnesium nitrate hexahydrate, lithium nitrate trihydrate, potassium fluoride tetrahydrate, ammonium alum, magnesium chloride hexahydrate, sodium carbonate

decahydrate, disodium phosphate dodecahydrate, sodium sulfate decahydrate, and sodium acetate trihydrate), waxes, oils, water, fatty acids, fatty acid esters, dibasic acids, dibasic esters, 1-halides, primary alcohols, aromatic compounds, clathrates, semi-clathrates, gas clathrates, anhydrides (e.g., stearic anhydride), ethylene carbonate, polyhydric alcohols (e.g., 2,2-dimethyl-1,3-propanediol, 2-hydroxymethyl-2-methyl-1,3-propanediol, ethylene glycol, polyethylene glycol, pentaerythritol, dipentaerythritol, pentaglycerine, tetramethylol ethane, neopentyl glycol, tetramethylol propane, monoaminopentaerythritol, diaminopentaerythritol, and tris(hydroxymethyl)acetic acid), polymers (e.g., polyethylene, polyethylene glycol, polypropylene, polypropylene glycol, polytetramethylene glycol, and copolymers, such as polyacrylate or poly(meth)acrylate with alkyl hydrocarbon side chain or with polyethylene glycol side chain and copolymers comprising polyethylene, polyethylene glycol, polypropylene, polypropylene glycol, or polytetramethylene glycol), metals, and mixtures thereof.

Table 1 provides a list of exemplary paraffinic hydrocarbons that may be used as the phase change material in the multi-component fibers described herein.

Table 1

Paraffinic Hydrocarbon	No. of Carbon Atoms	Melting Point °C
n-Octacosane	28	61.4
n-Heptacosane	27	59.0
n-Hexacosane	26	56.4
n-Pentacosane	25	53.7
n-Tetracosane	24	50.9
n-Tricosane	23	47.6
n-Docosane	22	44.4
n-Heneicosane	21	40.5
n-Eicosane	20	36.8
n-Nonadecane	19	32.1
n-Octadecane	18	28.2
n-Heptadecane	17	22.0
n-Hexadecane	16	18.2
n-Pentadecane	15	10.0
n-Tetradecane	14	5.9
n-Tridecane	13	-5.5

5 A phase change material can comprise a mixture of two or more substances (e.g., two or more of the exemplary phase change materials discussed above). By selecting two or more different substances (e.g., two different paraffinic hydrocarbons) and forming a mixture thereof, a temperature stabilizing range can be adjusted over a wide range for any particular application of the multi-component fiber. According to some embodiments of the invention, a phase change material may comprise a copolymer of two or more substances (e.g., two or more of the exemplary phase change materials discussed above).

10 According to some embodiments of the invention, the temperature regulating material may comprise a phase change material in a raw form (e.g., the phase change material is non-encapsulated, i.e., not micro- or macroencapsulated). During manufacture

of the multi-component fiber, the phase change material in the raw form may be provided as a solid in a variety of forms (e.g., bulk form, powders, pellets, granules, flakes, and so forth) or as a liquid in a variety of forms (e.g., molten form, dissolved in a solvent, and so forth).

According to other embodiments of the invention, the temperature regulating material may further comprise a containment structure that encapsulates, contains, surrounds, or absorbs a phase change material. This containment structure may facilitate handling of the phase change material while offering a degree of protection to the phase change material during manufacture of the multi-component fiber or an article made therefrom (e.g., protection from high temperatures or shear forces). Moreover, the containment structure may serve to prevent leakage of the phase change material from the multi-component fiber during use.

For instance, the temperature regulating material may comprise a plurality of microcapsules that contain a phase change material, and the microcapsules may be uniformly, or non-uniformly, dispersed within at least one of the elongated members. The microcapsules may be formed as hollow shells enclosing the phase change material and may comprise individual microcapsules formed in a variety regular or irregular shapes (e.g., spherical, ellipsoidal, and so forth) and sizes. The individual microcapsules may have the same or different shapes or sizes. According to some embodiments of the invention, the microcapsules may have a maximum linear dimension (e.g., diameter) ranging from about 0.01 to about 100 microns. In one presently preferred embodiment, the microcapsules will have a generally spherical shape and will have a maximum linear dimension (e.g., diameter) ranging from about 0.5 to about 3 microns. Other examples of the containment structure may include, by way of example and not by limitation, silica particles (e.g., precipitated silica particles, fumed silica particles, and mixtures thereof), zeolite particles, carbon particles (e.g., graphite particles, activated carbon particles, and mixtures thereof), and absorbent materials (e.g., absorbent polymeric materials, superabsorbent materials, cellulosic materials, poly(meth)acrylate materials, metal salts of poly(meth)acrylate materials, and mixtures thereof). For instance, the temperature regulating material may comprise silica particles, zeolite particles, carbon particles, or an absorbent material impregnated with a phase change material.

According to some embodiments of the invention, one or more elongated members may each comprise from about 5 percent to about 70 percent by weight of the temperature regulating material. Thus, in one embodiment, an elongated member may comprise 60



percent by weight of the temperature regulating material, and in other embodiments, the elongated member may comprise from about 10 percent to about 30 percent or from about 15 percent to about 25 percent by weight of the temperature regulating material.

As discussed previously, a multi-component fiber according to some embodiments of the invention may comprise a plurality of elongated members that may be formed from the same or different polymeric materials. According to some embodiments of the invention, the elongated members may include a first elongated member (or a first plurality of elongated members) formed from a first polymeric material that has a temperature regulating material dispersed therein. In addition, the elongated members may include a second elongated member (or a second plurality of elongated members) formed from a second polymeric material that may differ in some fashion from the first polymeric material. According to some embodiments of the invention, the elongated members may be formed from the same polymeric material, in which case the first and second polymeric materials will be the same.

In general, a polymeric material (e.g., the first polymeric material or the second polymeric material) may comprise any polymer (or mixture of polymers) that has the capability of being formed into an elongated member. According to some embodiments of the invention, an elongated member may be formed from any fiber-forming polymer (or mixture of fiber-forming polymers). According to embodiments of the invention wherein a melt spinning process is used to form the multi-component fiber, a polymeric material may comprise a thermoplastic polymer (or mixture of thermoplastic polymers) (i.e., one that can be heated to form a melt and subsequently shaped or molded to form an elongated member).

A polymeric material may comprise a polymer (or mixture of polymers) having a variety of chain structures that include one or more types of monomer units. In particular, a polymeric material may comprise a linear polymer, a branched polymer (e.g., star branched polymer, comb branched polymer, or dendritic branched polymer), or a mixture thereof. A polymeric material may comprise a homopolymer, a copolymer (e.g., statistical copolymer, random copolymer, alternating copolymer, periodic copolymer, block copolymer, radial copolymer, or graft copolymer), or a mixture thereof. As one of ordinary skill in the art will understand, the reactivity and functionality of a polymer may be altered by addition of a group such as, for example, amine, amide, carboxyl, hydroxyl, ester, ether, epoxide, anhydride, isocyanate, silane, ketone, and aldehyde. Also, a polymer comprising a

polymeric material may be capable of crosslinking, entanglement, or hydrogen bonding in order to increase its toughness or its resistance to heat, moisture, or chemicals.

Exemplary polymers that may be used to form an elongated member according to various embodiments of the invention include, by way of example and not by limitation,

5 polyamides (e.g., Nylon 6, Nylon 6/6, Nylon 12, polyaspartic acid, polyglutamic acid, and so forth), polyamines, polyimides, polyacrylics (e.g., polyacrylamide, polyacrylonitrile, esters of methacrylic acid and acrylic acid, and so forth), polycarbonates (e.g., polybisphenol A carbonate, polypropylene carbonate, and so forth), polydienes (e.g., polybutadiene, polyisoprene, polynorbornene, and so forth), polyepoxides, polyesters (e.g.,  
10 polyethylene terephthalate, polybutylene terephthalate, polytrimethylene terephthalate, polycaprolactone, polyglycolide, polylactide, polyhydroxybutyrate, polyhydroxyvalerate, polyethylene adipate, polybutylene adipate, polypropylene succinate, and so forth), polyethers (e.g., polyethylene glycol (polyethylene oxide), polybutylene glycol, polypropylene oxide, polyoxymethylene (paraformaldehyde), polytetramethylene ether  
15 (polytetrahydrofuran), polyepichlorohydrin, and so forth), polyfluorocarbons, formaldehyde polymers (e.g., urea-formaldehyde, melamine-formaldehyde, phenol formaldehyde, and so forth), natural polymers (e.g., cellulose, chitosans, lignins, waxes, and so forth), polyolefins (e.g., polyethylene, polypropylene, polybutylene, polybutene, polyoctene, and so forth), polyphenylenes (e.g., polyphenylene oxide, polyphenylene sulfide, polyphenylene  
20 ether sulfone, and so forth), silicon containing polymers (e.g., polydimethyl siloxane, polycarbomethyl silane, and so forth), polyurethanes, polyvinyls (e.g., polyvinyl butyral, polyvinyl alcohol, polyvinyl acetate, polystyrene, polymethylstyrene, polyvinyl chloride, polyvinyl pyrrolidone, polymethyl vinyl ether, polyethyl vinyl ether, polyvinyl methyl ketone, and so forth), polyacetals, polyarylates, and copolymers (e.g., polyethylene-co-vinyl  
25 acetate, polyethylene-co-acrylic acid, polybutylene terephthalate-co-polytetramethylene terephthalate, polylauryllactam-block-polytetrahydrofuran, and so forth).

According to some embodiments of the invention, the first polymeric material may comprise a polymer (or mixture of polymers) that facilitates dispersing or incorporating the temperature regulating material within the first elongated member (or the first plurality of  
30 elongated members). According to some embodiments of the invention, the first polymeric material may comprise a polymer (or mixture of polymers) that is compatible with or has an affinity for the temperature regulating material. Such affinity may facilitate dispersion of the temperature regulating material in an intermediate molten or liquid form of the first

polymeric material during manufacture of the multi-component fiber and, thus, ultimately may facilitate incorporation of more uniform or greater amounts or loading level of a phase change material in the multi-component fiber. In embodiments where the temperature regulating material further comprises a containment structure, the first polymeric material may comprise a polymer (or mixture of polymers) selected for its affinity for the containment structure in conjunction with or as an alternative to its affinity for the phase change material. For instance, if the temperature regulating material comprises a plurality of microcapsules containing the phase change material, a polymer (or mixture of polymers) may be selected having an affinity for the microcapsules (e.g., for a material or materials of which the microcapsules are formed). For instance, some embodiments of the invention may select the first polymeric material to comprise the same or a similar polymer as a polymer comprising the microcapsules (e.g., if the microcapsules comprise nylon shells, the first polymeric material may be selected to comprise nylon). Such affinity may facilitate dispersion of the microcapsules containing the phase change material in an intermediate molten or liquid form of the first polymeric material and, thus, ultimately facilitates incorporation of more uniform or greater amounts or loading level of the phase change material in the multi-component fiber.

According to some embodiments of the invention, the first polymeric material may comprise a polymer (or mixture of polymers) that has a slight or partial compatibility with or affinity for the temperature regulating material. Such partial affinity may be adequate to facilitate dispersion of the temperature regulating material and to facilitate processing at higher temperatures and during a melt spinning process. At lower temperatures and shear conditions and once the multi-component fiber has been formed, this partial affinity may allow the temperature regulating material to separate out. For embodiments of the invention wherein a phase change material in a raw form is used, this partial affinity may lead to insolubilization of the phase change material and increased phase change material domain formation within the multi-component fiber. According to some embodiments of the invention, domain formation may lead to an improved thermal regulating property by facilitating transition of the phase change material between two states. For example, certain phase change materials such as paraffinic hydrocarbons may be compatible with polymeric materials comprising polyethylene or polyethylene-co-vinyl acetate at lower concentrations of the phase change materials or when the temperature is above a critical solution temperature. Mixing of a paraffinic hydrocarbon and polyethylene or polyethylene-co-vinyl

acetate may be achieved at higher temperatures and higher concentrations of the paraffinic hydrocarbon to produce a homogenous blend that may be easily controlled, pumped, and processed in a melt spinning process. Once a multi-component fiber has been formed and has cooled, the paraffinic hydrocarbon may become insoluble and may separate out into distinct domains. These domains may allow for pure melting or crystallization of the paraffinic hydrocarbon for an improved thermal regulating property.

According to an embodiment of the invention, the first polymeric material may comprise a low molecular weight polymer (or a mixture of low molecular weight polymers). A low molecular weight polymer typically has a low viscosity when heated to form a melt, which low viscosity may facilitate dispersion of the temperature regulating material in the melt. As one of ordinary skill in the art will understand, some polymers may be provided in a variety of forms having different molecular weights, since the molecular weight of a polymer may be determined by conditions used for manufacturing the polymer.

Accordingly, as used herein, the term "low molecular weight polymer" may refer to a low molecular weight form of a polymer (e.g., a low molecular weight form of an exemplary polymer discussed previously), and the term "molecular weight" may refer to a number average molecular weight, weight average molecular weight, or melt index of the polymer. For instance, a polyethylene having a number average molecular weight of about 20,000 (or less) may be used as the low molecular weight polymer in an embodiment of the invention. It should be recognized that a molecular weight or range of molecular weights associated with a low molecular weight polymer may depend on the particular polymer selected (e.g., polyethylene) or on the method or equipment used to disperse the temperature regulating material in a melt of the low molecular weight polymer.

According to another embodiment of the invention, the first polymeric material may comprise a mixture of a low molecular weight polymer and a high molecular weight polymer. A high molecular weight polymer typically has enhanced physical properties (e.g., mechanical properties) but may have a high viscosity when heated to form a melt. As used herein, the term "high molecular weight polymer" may refer to a high molecular weight form of a polymer (e.g., a high molecular weight form of an exemplary polymer discussed previously). A low molecular weight polymer or a high molecular weight polymer may be selected to be compatible with or to have an affinity for one another. Such affinity may facilitate forming a mixture of the low molecular weight polymer, the high molecular weight polymer, and the temperature regulating material during manufacture of

the multi-component fiber and, thus, ultimately facilitates incorporation of more uniform or greater amounts or loading level of the phase change material in the multi-component fiber. According to some embodiments of the invention, the low molecular weight polymer serves as a compatibilizing link between the high molecular weight polymer and the temperature regulating material to thereby facilitate incorporating the temperature regulating material in the multi-component fiber.

According to some embodiments of the invention, an elongated member may typically comprise from about 10 percent to about 30 percent by weight of the temperature regulating material with the remaining portion of the elongated member comprising a low molecular weight polymer and a high molecular weight polymer. For example, in one presently preferred embodiment, the elongated member may comprise 15 percent by weight of the low molecular weight polymer, 70 percent by weight of the high molecular weight polymer, and 15 percent by weight of the temperature regulating material.

According to some embodiments of the invention, the second polymeric material may comprise a polymer (or mixture of polymers) that has or provides one or more desired physical properties for the multi-component fiber. Exemplary desired physical properties include, by way of example and not by limitation, mechanical properties (e.g., ductility, tensile strength, and hardness), thermal properties (e.g., thermoformability), and chemical properties (e.g., reactivity). The second polymeric material may comprise a polymer (or mixture of polymers) selected to compensate for any deficiencies (e.g., mechanical or thermal deficiencies) of the first polymeric material or of the first elongated member (or the first plurality of elongated members), such as due to a high loading level of the temperature regulating material. According to some embodiments of the invention, the second polymeric material operates to improve the multi-component fiber's overall physical properties (e.g., mechanical properties) and the multi-component fiber's processability (e.g., by facilitating its formation via a melt spinning process). The second polymeric material may serve to enclose the temperature regulating material that is dispersed within the first elongated member (or the first plurality of elongated members). Accordingly, the second polymeric material may allow for the use of a first polymeric material or of a temperature regulating material that is not optimized for high temperature and high shear fiber processing. In addition, the second polymeric material may reduce or prevent loss or leakage of a phase change material during fiber processing or during end use.

According to an embodiment of the invention, the second polymeric material may comprise a high molecular weight polymer. As discussed previously, a high molecular weight polymer typically has enhanced physical properties (e.g., mechanical properties) and may be selected to be a high molecular weight form of a polymer (e.g., a high molecular weight form of an exemplary polymer discussed previously).

According to some presently preferred embodiments of the invention, the second polymeric material may comprise a polyester due, in part, to its excellent processability, properties imparted to a resulting fiber, and its resistance to certain phase change materials such as paraffinic hydrocarbons to reduce or prevent loss or leakage of these phase change materials. According to an embodiment of the invention, the polyester may have a number average molecular weight of about 20,000 (or more).

At this point, those of ordinary skill in the art can appreciate a number of advantages associated with various embodiments of the invention. For instance, a multi-component fiber in accordance with various embodiments of the invention can comprise high loading levels of one or more phase change materials dispersed within a first elongated member (or a first plurality of elongated members). According to some embodiments of the invention, a high loading level can be provided because a second elongated member (or a second plurality of elongated members) surrounds the first elongated member (or the first plurality of elongated members). The second elongated member may comprise a polymer (or mixture of polymers) selected to compensate for any deficiencies (e.g., mechanical or thermal deficiencies) associated with the first elongated member, such as due to the high loading level of the phase change material. Moreover, the second elongated member may comprise a polymer (or mixture of polymers) selected to improve the fiber's overall physical properties (e.g., mechanical properties) and the fiber's processability (e.g., by facilitating its formation via a melt spinning process). By surrounding the first elongated member, the second elongated member may serve to enclose the phase change material dispersed within the first elongated member to prevent loss or leakage of the phase change material.

Multi-component fibers in accordance with the invention can have virtually any proportion of the fiber's total weight comprising a first elongated member (or a first plurality of elongated members) having a temperature regulating material dispersed therein relative to a second elongated member (or a second plurality of elongated members). By way of example and not by limitation, when a thermal regulating property of a multi-component fiber is a controlling consideration, a larger proportion of the multi-component

fiber may comprise a first elongated member having a temperature regulating material dispersed therein. On the other hand, when the physical properties of the multi-component fiber (e.g., mechanical properties) are a controlling consideration, a larger proportion of the multi-component fiber may comprise a second elongated member that does not have the temperature regulating material dispersed therein. Alternatively, when balancing thermal regulating and physical properties of the multi-component fiber, it may be desirable that the second elongated member has the same or a different temperature regulating material dispersed therein.

A multi-component fiber in accordance with some embodiments of the invention may comprise from about 1 percent up to about 99 percent by weight of a first elongated member (or a first plurality of elongated members). Typically, a multi-component fiber according to an embodiment of the invention may comprise from about 10 percent to about 90 percent by weight of a first elongated member (or a first plurality of elongated members). For instance, an embodiment of a core/sheath fiber comprises 90 percent by weight of a core member and 10 percent by weight of a sheath member. For this embodiment, the core member may comprise 60 percent by weight of a temperature regulating material, yielding a core/sheath fiber comprising 54 percent by weight of the temperature regulating material.

Multi-component fibers in accordance with various embodiments of the invention may be manufactured using a variety methods, such as, for example, using a melt spinning process. Multi-component fibers in accordance with some embodiments of the invention may be formed using a multi-component fiber spin line. Exemplary spin lines are described in Hills, U.S. Patent 5,162,074, entitled "Method of Making Plural Component Fibers" and references cited therein, the disclosures of which are incorporated herein by reference in their entirety. For instance, a blend comprising a molten first polymeric material and a temperature regulating material dispersed therein and a molten second polymeric material may be provided. The blend and the molten second polymeric material may be directed to a spinneret comprising a plurality of orifices. More particularly, the blend and the molten second polymeric material may be directed to each orifice in various configurations to form a first elongated member (or a first plurality of elongated members) and a second elongated member (or a second plurality of elongated members), respectively, thus forming a multi-component fiber according to an embodiment of the invention. According to some embodiments of the invention, multi-component fibers may be formed using pellets

comprising a first polymeric material and a temperature regulating material. According  
some embodiments of the invention, the pellets may comprise a solidified melt mixture of  
the temperature regulating material, a low molecular weight polymer, and a high molecular  
weight polymer. The pellets may be melted to form a blend and processed along with a  
5 molten second polymeric material as discussed above to form multi-component fibers.

### EXAMPLE

10 The following example describes specific aspects of the invention to illustrate and  
provide a description of the invention for those of ordinary skill in the art. The example  
should not be construed as limiting the invention, as the example merely provides specific  
methodology useful in understanding and practicing the invention.

#### Example 1

15 About five pounds of a low molecular weight polyethylene homopolymer (AC-16  
polyethylene, drop point 102°C, manufactured by Honeywell Specialty Chemical) was  
added to a wet flushing apparatus, and the homopolymer was slowly melted and mixed at  
about 110° to about 130°C. Once the homopolymer was melted, about eight pounds of a  
wet cake was slowly added to the molten homopolymer over about a 30 minute time period  
20 to form a first blend. The wet cake comprised water-wetted microcapsules containing a  
phase change material (micro PCM lot #M 45-22, 63.2 percent by weight of microcapsules  
and phase change material, manufactured by Microtek Laboratories, Inc.).

Water was flashed off as the microcapsules containing the phase change material  
was added to and dispersed in the molten homopolymer. Mixing continued until less than  
25 about 0.15 percent by weight of the water remained (as measured using Karl-Fischer  
titration). The resulting first blend was then cooled and chopped to form a chopped material  
for further processing.

A dry blend was then formed by dry blending about thirty pounds of the chopped  
material with about seventy pounds of a fiber-grade polypropylene thermoplastic polymer  
30 (Polypropylene homopolymer 6852 from BP Amoco Polymers).

The resulting dry blend was then extruded using a 2 ½ inch single screw extruder  
with all zones set at about 230°C, with a screw speed of about 70 rpm, with 150 mesh filter  
screens, and with a nitrogen purge. In this manner, pellets were formed. The pellets were



then dried overnight in a desiccant bed polymer pellet drying system at 105°C and at -40°C dewpoint. These pellets provided 23.1 J/g of thermal energy storage capacity (i.e., latent heat) as measured by DSC (Differential Scanning Calorimeter) measurements.

Multi-component fibers (here, bi-component fibers) were then melt spun on a bi-component fiber spin line using the pellets to form core members and using polypropylene or nylon to form sheath members. Spin lines of this general type are described in Hills, U.S. Patent 5,162,074, entitled "Method of Making Plural Component Fibers". The multi-component fibers were melt spun at temperatures between 230°C and 245°C.

Multi-component fibers with various core/sheath ratios and polymeric materials were produced. With reference to FIG. 4, a number of properties and manufacturing parameters of six core/sheath fibers that were produced are set forth. These fibers all incorporate a phase change material and microcapsules that contains the phase change material ("mPCM"), which makes up about 15 percent by weight of each fiber's core member and from about 7.5 percent to about 11.25 percent by weight of each fiber's total weight. Samples 1, 2 and 3 have a sheath member comprising polypropylene ("PP"), which is a polypropylene homopolymer from BP Amoco Polymers. Samples 4, 5 and 6 have a sheath member comprising Nylon 6, which is produced under the name Ultramid B from BASF Corp.

Each of the patent applications, patents, publications, and other published documents mentioned or referred to in this specification is herein incorporated by reference in its entirety, to the same extent as if each individual patent application, patent, publication, and other published document was specifically and individually indicated to be incorporated by reference.

While the present invention has been described with reference to the specific embodiments thereof, it should be understood by those skilled in the art that various changes may be made and equivalents may be substituted without departing from the true spirit and scope of the invention as defined by the appended claims. In addition, many modifications may be made to adapt a particular situation, material, composition of matter, method, process step or steps, to the objective, spirit and scope of the present invention. All such modifications are intended to be within the scope of the claims appended hereto. In particular, while the methods disclosed herein have been described with reference to particular steps performed in a particular order, it will be understood that these steps may be

combined, sub-divided, or re-ordered to form an equivalent method without departing from the teachings of the present invention. Accordingly, unless specifically indicated herein, the order and grouping of the steps is not a limitation of the present invention.

What is claimed is:

1. A multi-component fiber having enhanced reversible thermal properties, comprising:  
a fiber body formed from a plurality of elongated members, at least one of the  
5 elongated members having a temperature regulating material dispersed therein, wherein the  
temperature regulating material comprises a phase change material.
2. The multi-component fiber of claim 1, wherein the phase change material is selected  
from the group consisting of hydrocarbons, hydrated salts, waxes, oils, water, fatty acids,  
fatty acid esters, dibasic acids, dibasic esters, 1-halides, primary alcohols, aromatic  
10 compounds, clathrates, semi-clathrates, gas clathrates, stearic anhydride, ethylene  
carbonate, polyhydric alcohols, polymers, metals, and mixtures thereof.
3. The multi-component fiber of claim 1, wherein the temperature regulating material  
further comprises a plurality of microcapsules that contain the phase change material.
4. The multi-component fiber of claim 1, wherein the temperature regulating material  
15 further comprises silica particles, zeolite particles, carbon particles, or an absorbent material  
impregnated with the phase change material.
5. The multi-component fiber of claim 1, wherein the elongated members are arranged  
in an island-in-sea configuration, a segmented-pie configuration, a core-sheath  
configuration, a side-by-side configuration, or a striped configuration.
- 20 6. The multi-component fiber of claim 1, wherein a cross sectional shape of the fiber  
body is circular, multi-lobal, octagonal, oval, pentagonal, rectangular, square-shaped,  
trapezoidal, or triangular.
7. A multi-component fiber having enhanced reversible thermal properties, comprising:  
a first elongated member comprising a first polymeric material and a temperature  
25 regulating material dispersed within the first polymeric material, wherein the temperature  
regulating material comprises a phase change material; and  
a second elongated member comprising a second polymeric material, wherein the  
second elongated member is joined with the first elongated member.

8. The multi-component fiber of claim 7, wherein the phase change material is a hydrocarbon or a mixture of hydrocarbons.

9. The multi-component fiber of claim 7, wherein the temperature regulating material further comprises a plurality of microcapsules that contain the phase change material.

5 10. The multi-component fiber of claim 9, wherein the first polymeric material has an affinity for the microcapsules to facilitate dispersing the microcapsules within the first polymeric material.

10 11. The multi-component fiber of claim 7, wherein the first polymeric material and the second polymeric material are independently selected from the group consisting of polyamides, polyamines, polyimides, polyacrylics, polycarbonates, polydienes, polyepoxides, polyesters, polyethers, polyfluorocarbons, formaldehyde polymers, natural polymers, polyolefins, polyphenylenes, silicon containing polymers, polyurethanes, polyvinyls, polyacetals, polyarylates, copolymers, and mixtures thereof.

15 12. The multi-component fiber of claim 7, wherein the first elongated member is surrounded by the second elongated member.

13. The multi-component fiber of claim 12, wherein the first elongated member is positioned within and completely surrounded by the second elongated member.

20 14. The multi-component fiber of claim 7, wherein the first elongated member comprises from about 10 percent to about 90 percent of a total weight of the multi-component fiber.

15. A multi-component fiber having enhanced reversible thermal properties, comprising:  
a core member comprising a first polymeric material and a temperature regulating material dispersed within the first polymeric material, wherein the temperature regulating material comprises a phase change material; and

25 a sheath member comprising a second polymeric material, wherein the sheath member surrounds the core member.

16. The multi-component fiber of claim 15, wherein the phase change material is selected from the group consisting of hydrocarbons, hydrated salts, waxes, oils, water, fatty acids, fatty acid esters, dibasic acids, dibasic esters, 1-halides, primary alcohols, aromatic

compounds, clathrates, semi-clathrates, gas clathrates, stearic anhydride, ethylene carbonate, polyhydric alcohols, polymers, metals, and mixtures thereof.

17. The multi-component fiber of claim 15, wherein the temperature regulating material further comprises a containment structure that contains the phase change material, and wherein the containment structure comprises microcapsules, silica particles, zeolite particles, carbon particles, or an absorbent material.

18. The multi-component fiber of claim 15, wherein the temperature regulating material is a first temperature regulating material, and wherein the sheath member further comprises a second temperature regulating material dispersed within the second polymeric material.

19. The multi-component fiber of claim 18, wherein the first temperature regulating material and the second temperature regulating material are different.

20. The multi-component fiber of claim 15, wherein the first polymeric material and the second polymeric material are independently selected from the group consisting of polyamides, polyamines, polyimides, polyacrylics, polycarbonates, polydienes, polyepoxides, polyesters, polyethers, polyfluorocarbons, formaldehyde polymers, natural polymers, polyolefins, polyphenylenes, silicon containing polymers, polyurethanes, polyvinyls, polyacetals, polyarylates, copolymers, and mixtures thereof.

21. The multi-component fiber of claim 15, wherein the first polymeric material has an affinity for the phase change material, and wherein the second polymeric material encloses the phase change material within the core member and provides a desired physical property to the multi-component fiber.

22. The multi-component fiber of claim 15, wherein the core member is positioned within and completely surrounded by the sheath member.

23. The multi-component fiber of claim 15, wherein the core member is concentrically positioned within the sheath member.

24. The multi-component fiber of claim 15, wherein the core member is eccentrically positioned within the sheath member.

25. The multi-component fiber of claim 15, wherein a cross sectional shape of the core member is circular, multi-lobal, octagonal, oval, pentagonal, rectangular, square-shaped, trapezoidal, triangular, or wedge-shaped.

1/2

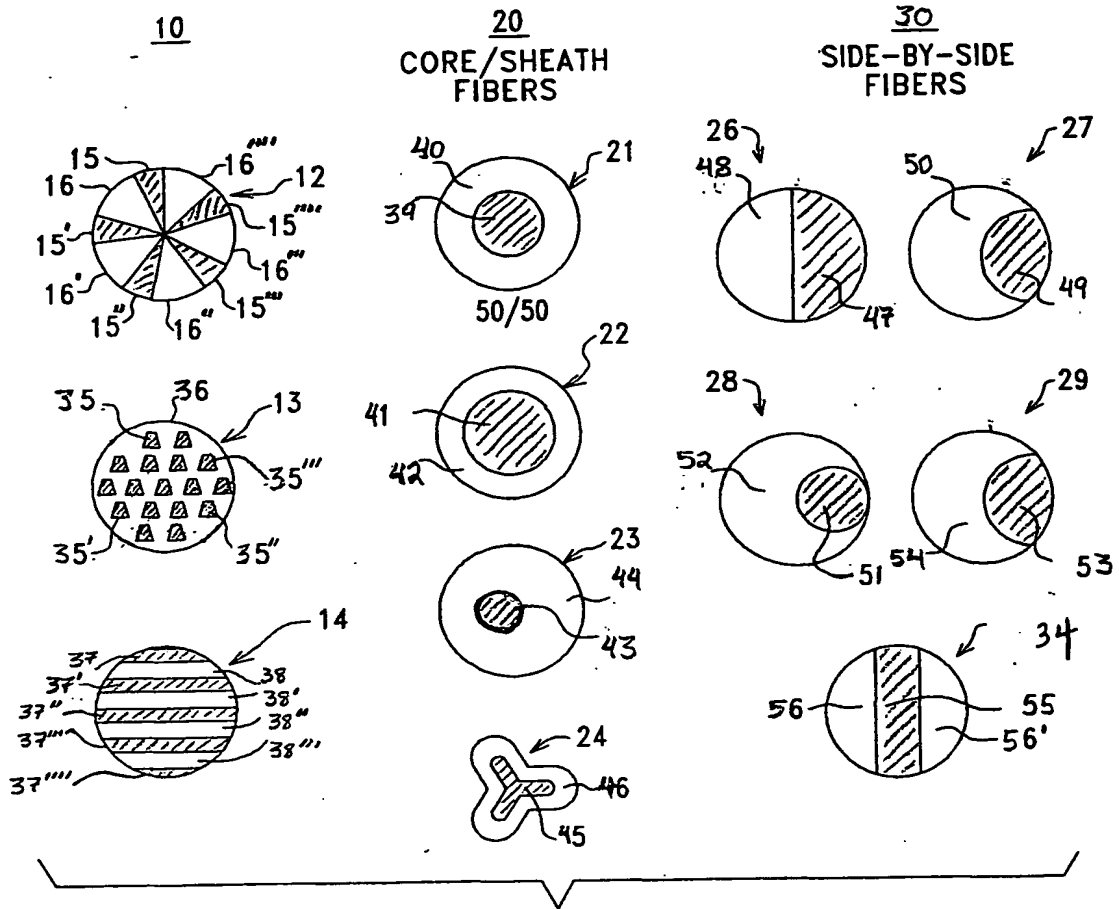


FIG. 1


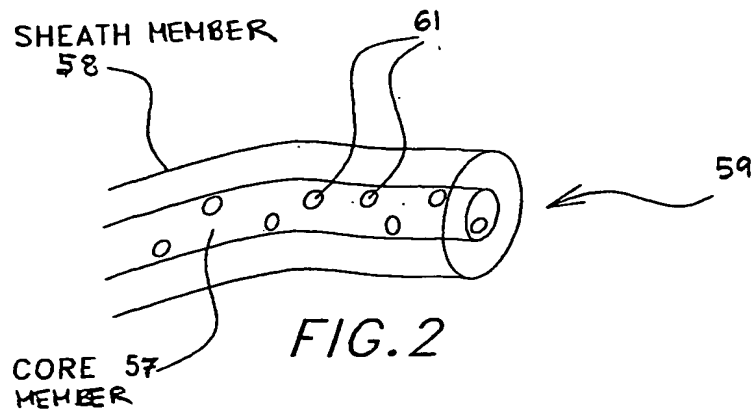


FIG. 2

2/2

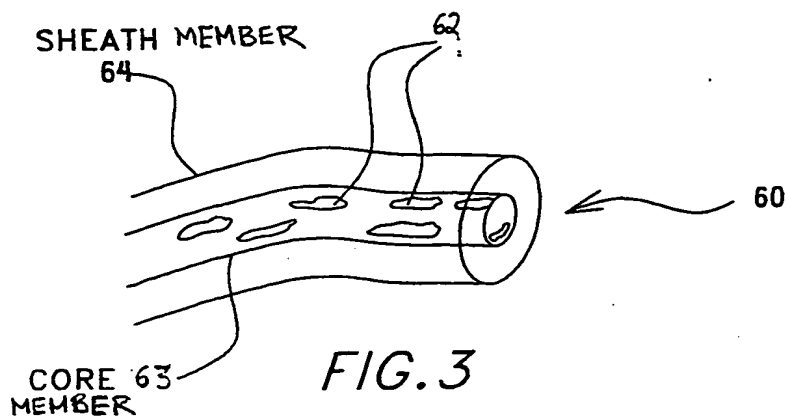

MELT SPUN BICOMPONENT FIBERS WITH REVERSIBLE THERMAL PROPERTIES

	SAMPLE 1	SAMPLE 2	SAMPLE 3	SAMPLE 4	SAMPLE 5	SAMPLE 6
CORE POLYMER	15% mPCM CONC.	15% mPCM CONC.	15% mPCM CONC.	15% mPCM CONC.	15% mPCM CONC.	15% mPCM CONC.
SHEATH POLYMER	PP	PP	PP	NYLON 6	NYLON 6	NYLON 6
CORE WT. %	50	75	50	50	75	50
SHEATH WT. %	50	25	50	50	25	50
WINDING SPEED	1000	1000	2000	1100	1100	2000
# FILAMENTS	64	64	64	64	64	64
SPIN DENIER	1152	1152	400	1152	1152	400
SPIN EASE	EXCELLENT	EXCELLENT	GOOD	EXCELLENT	EXCELLENT	GOOD
% mPCM	7.5	11.25	7.5	7.5	11.25	7.5
FIBER LATENT HEAT (J/G)	11.5	17.1	10.5	9.4	15.5	10.3

FIG. 4



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/29648

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 D01F8/04 D01F1/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 D01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Section Ch, Week 199706 Derwent Publications Ltd., London, GB; Class A17, AN 1997-062307 XP002187982 & JP 08 311716 A (NIPPON ESTER CO LTD), 26 November 1996 (1996-11-26)	1,2,5-8, 11-16, 20-25
Y	abstract	3,4,9, 10,17-19
Y	EP 0 306 202 A (TRIANGLE RES & DEV CORP) 8 March 1989 (1989-03-08) the whole document	3,9,10, 17
Y	claim 7	18,19
Y	WO 99 25549 A (OUTLAST TECHNOLOGIES INC) 27 May 1999 (1999-05-27) page 2, line 12 -page 3, line 25	3,4,9, 10,17

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

22 January 2002

Date of mailing of the international search report

07/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tarrida Torrell, J

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 01/29648

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 8311716	A	26-11-1996	NONE	
EP 0306202	A	08-03-1989	US 4756958 A	12-07-1988
			CA 1315083 A1	30-03-1993
			DE 3854106 D1	10-08-1995
			DE 3854106 T2	08-02-1996
			EP 0306202 A2	08-03-1989
			JP 1085374 A	30-03-1989
			JP 1851056 C	21-06-1994
			JP 5055607 B	17-08-1993
WO 9925549	A	27-05-1999	US 6077597 A	20-06-2000
			EP 1028846 A1	23-08-2000
			JP 2001523596 T	27-11-2001
			WO 9925549 A1	27-05-1999
			US 6217993 B1	17-04-2001